



## SPECIFICATIONS

Rated Current: 1.0AMP  
 Contact Resistance: 20mΩ Max  
 Withstand Voltage: 500V AC/DC  
 Insulation Resistance: 1000MΩ Min  
 Operation Temperature: -40°C to +105°C

Contact Material: Brass  
 Contact Plating: Au or Sn Over Ni  
 Insulator Material: Polyester (UL94V-0)  
 Standard: PA6T  
 Max. Processing Temp: 230°C for 30-60 seconds  
 (260°C for 10 seconds)

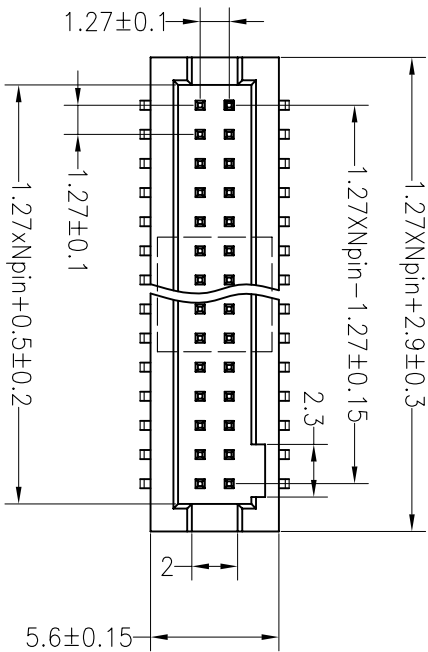



Recommended P.C.B Layout (Top Side)  
 (PCB BOARD TOLERANCE ±0.05)

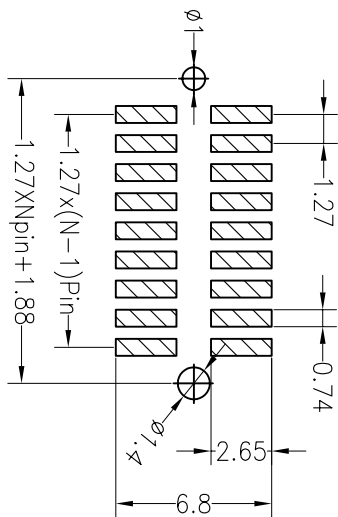


## Ordering Information

3232 XX M XX X B K00 X 0X(1,2)

- No. of Pins 10-100P
- Contact Plating 60:Gold Flash
- Insulator Material Option
- Packing 0=PE Bag

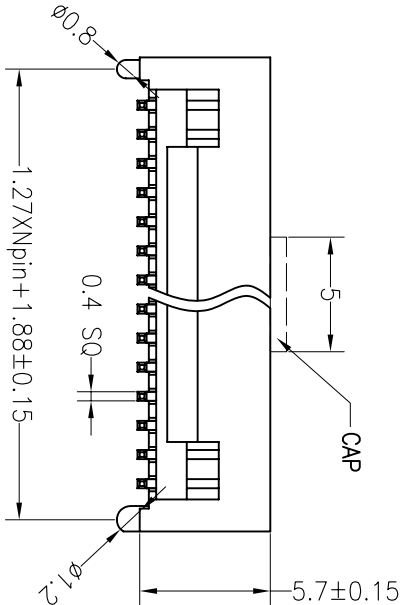

TYPE2 With Post



TYPE1 Without Post

**JIN** 深圳市锦凌电子有限公司  
 SHENZHEN JINLING ELECTRONIC CO.,LTD  
 Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5992

OPERATION	DRAW	BEN	SCALE	FIT	PART NO.
X.X	±0.30	12.09.18	UNIT	mm	3232XXMXXXBK00X01(2)
X.XX	±0.20		SIZE	A4	
X.XXX	±0.10		SHEET	1/1	1.27Box Header Npin H5.7 SMT
Angle	±3°		PROJ.		

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A0	2012.09.18	NEW DRAWING	
1			