




FILE NO.: E362810


SPECIFICATIONS

Rated Current: 1.0AMP
 Contact Resistance: 20mΩ Max
 Withstand Voltage: 500V AC/DC
 Insulation Resistance: 1000MΩ Min
 Operation Temperature: -40°c to +105°c

Contact Material: Brass
 Contact Plating: Au or Sn Over Ni
 Insulator Material: Polyester (UL94V-0)
 Standard: PA6T
 Max. Processing Temp: 230°C for 30-60 seconds
 (260°C for 10 seconds)

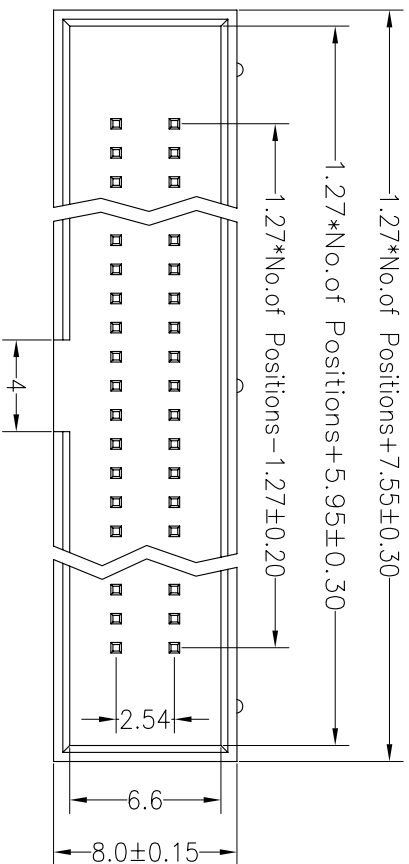



Recommended P.C.B Layout (Top Side)
 (PCB BOARD TOLERANCE ±0.05)

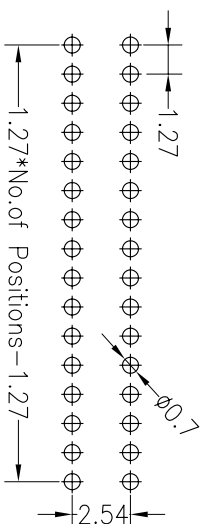

Ordering Information

3240 XX S XX X B K00 X 01

No. of Pins: 10-100P
 Contact Plating: G0: Gold Flash, G2: 5U" Gold, G3: 10U" Gold, G4: 15U" Gold, G5: 30U" Gold, S0: Gold Flash/Tin
 Insulator Material Option: A=BK-PBT, B=BK-PA66, C=BK-PA6T, D=BK-PA46, E=BK-PA9T, F=BK-LCP
 Packing: 0=Pe Bag, T=Tube, A=Troy, P=Tube+Cap, R=Reel+Cap, SN:Tin

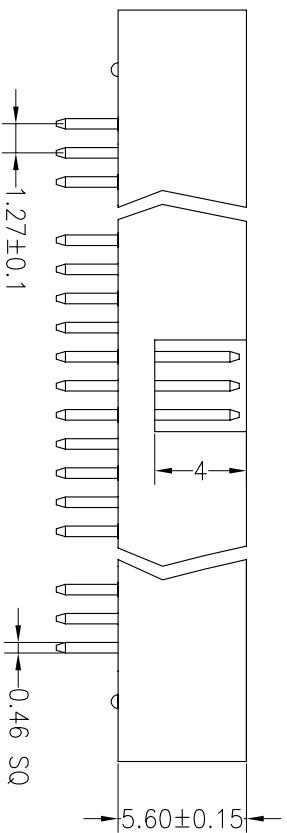

A	REV	DATE	MODIFICATION DESCRIPTION	CHANGE	DIM	TOL	OPERATION	DRAW	BEN	14.04.18	SCALE	FIT	PART NO. 3240XXSXXBK00X01
	A0	2014.04.18	NEW DRAWING		X.XX	±0.30	X.XX	CHECK			UNIT	mm	
B					X.XX	±0.20	X.XXX	CHECK			SIZE	A4	TITLE: 1.27X2.54 Box Header Npin H5.6 180° L=8.0MM
C					Angle	±3°	APPROVE				SHEET	1/1	
D											PROJ.		
E													
F													
G													

JIN 深圳市锦凌电子有限公司
 SHENZHEN JINLING ELECTRONIC CO.,LTD
 Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5992