
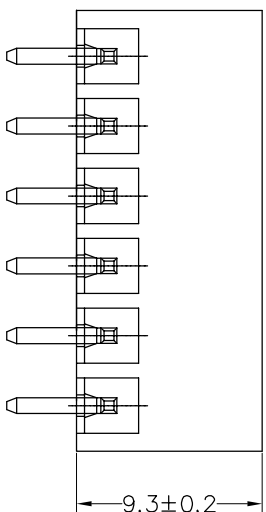
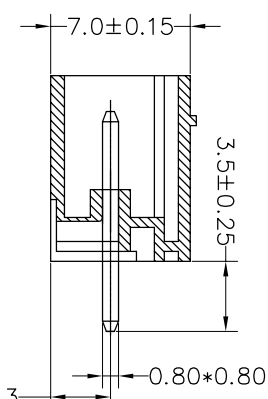


SPECIFICATIONS

Rated(额定参数): 300V,8A
 Dielectric strength(抗电强度): AC1500V/1 Minute
 Insulation Resistance(绝缘电阻):1000MΩ Min
 Contact Resistance(接触电阻):20mΩ Max
 Temp. range(操作温度): -40℃~+105℃
 MAX Soldering(瞬时温度):+250°C,5s

Housing Material(塑件): PA66 (UL94 V-0)
 Contact(端子): Brass, Tin plating(黄铜镀锡)

PITCH RANGE		NOMINAL DIMENSION RANGE				
IN MM	OVER	IN MM	OVER	OVER	OVER	OVER
TO 6	10	TO 30	60	100	150	OVER 150
TO 10	24	TO 60	100	150		
±0.10	±0.15	±0.25	±0.30	±0.30	±0.50	±0.70
						±1.00

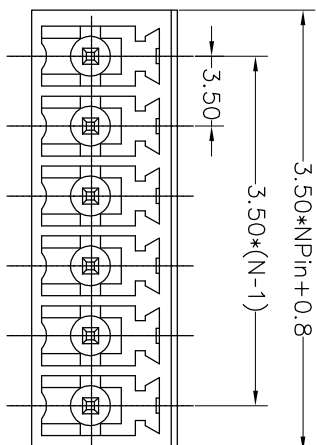

Ordering Information


JL15EDGVC-350 XX G X 1

Pitch
 350=3.5PH
 381=3.81PH

No. of pins
 2P~24P

Housing Color
 B=Black
 G=Green
 U=Blue
 R=Red
 W=White
 Y=Yellow
 O=Orange
 E=Grey

Packing
 0=Pe bog
 A=Troy
 T=Tube

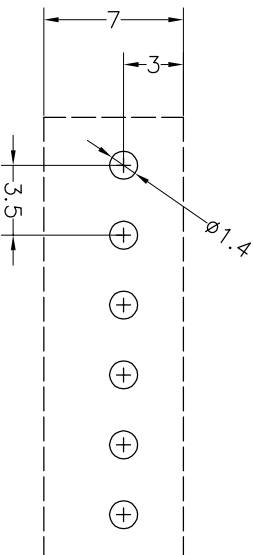

Recommended P.C.B. Layout(Top Side)

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	DIM	TOL	APPROVE	SCALE	FIT	PART NO.	TITLE:
A0	2019.12.09	NEW DRAWING		Angle	±3°		UNIT	mm	JL15EDGVC-350XXGX1	3.50mm Pitch Male Pluggable Terminal Blocks
1			4				SIZE	A4		
OPERATION			DRAW	SCALE		FIT				
XX			yiyusheng	19.12.09	UNIT	mm				
X.XX			CHECK	SIZE	A4					
X:XXX			APPROVE	SHEET	1/1					
Angle				PROJ.						
±0.20										
±0.10										
±3°										

JIN 深圳市锦凌电子有限公司
 SHENZHEN JINLING ELECTRONIC CO.,LTD
 Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5992