

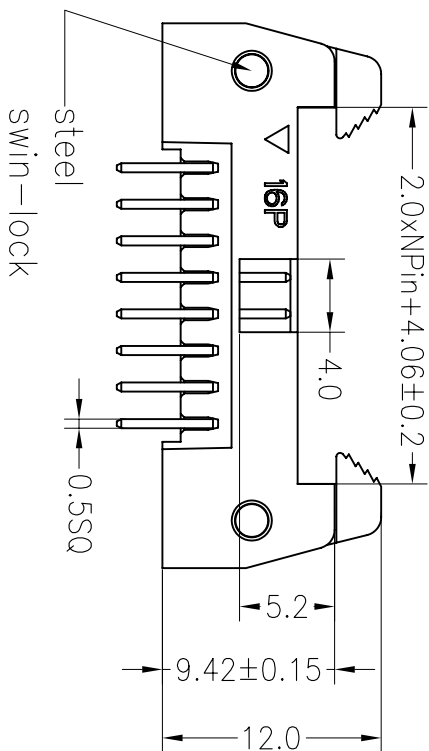
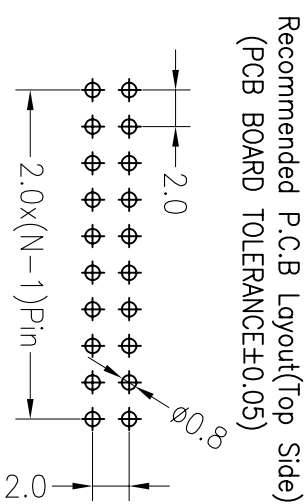


SPECIFICATIONS

Rated Current:1.50AMP
 Contact Resistance:20mΩ Max
 Withstand Voltage:500V AC/DC
 Insulation Resistance:800MΩ Min
 Operation Temperature:-40°c to +105°c

Contact Material:Brass
 Contact Plating:Au or Sn Over Ni
 Insulator Material:Polyester(UL94V-0)
 Standard: PA6T
 Max.Processing Temp: 230°C for 30-60 seconds
 (260°C for 10 seconds)

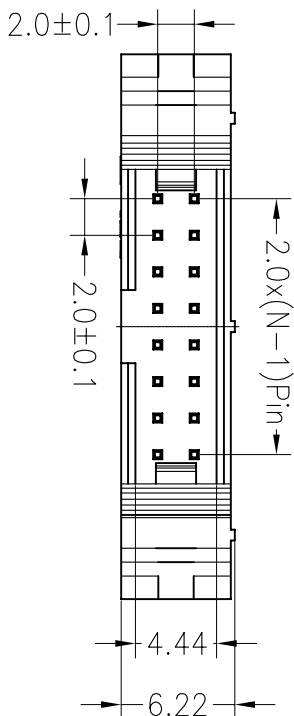

Ordering Information


3321 XX S XX C B L A01

No. of Pins 10--50
 Contact Plating G0:Gold Flash
 G1:2U" Gold
 G2:5U" Gold
 G3:10U" Gold
 G4:15U" Gold
 G5:30U" Gold
 S0:Gold Flash/Tin
 SN:Tin
 Sk:Katte-Tin

Insulator Material Option
 A=BK-FBT
 B=BK-PA66
 C=BK-PA6T
 D=BK-PA46
 E=BK-PA9T
 F=BK-LCP

Color Type
 B=Black
 G=Grey

Packing
 O=PE Bag
 A=Troy
 T=Tube

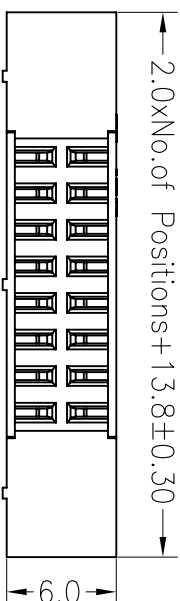

OPERATION		DRAW		YTYuSheng		15.08.04		SCALE		FIT		PART NO.	
X.X		±0.30		CHECK		A4		mm		1/1		3321XXSXXCBLA01	
X.XX		±0.20		APPROVE		PROJ.		SHEET		1/1		TITLE:	
X.XXX		±0.10		CHANGE		DIM		TOL		2.0		ejector header Npin 180° DIP L9.5mm	
REV		DATE		MODIFICATION DESCRIPTION		1		2		3		4	
A0		2015.08.04		NEW DRAWING		1		2		3		4	

JILIN 深圳市锦凌电子有限公司
 SHENZHEN JINLING ELECTRONIC CO.,LTD
 Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5992