
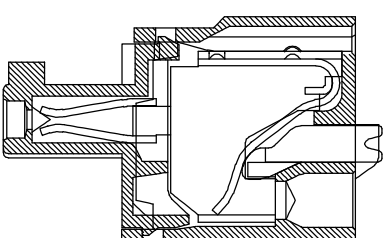
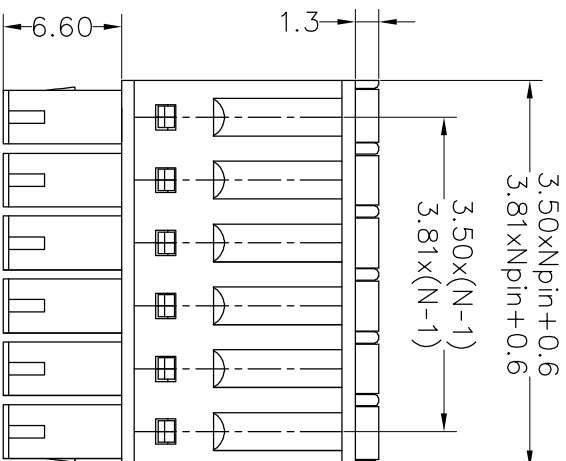


**SPECIFICATIONS**

Rated(额定参数): 300V,8A  
 Dielectric strength(抗电强度): AC1500V/1 Minute  
 Insulation Resistance(绝缘电阻):5000MΩ Min  
 Contact Resistance(接触电阻):20mΩ Max  
 Wire Range(线径):1.6~28AWG  
 Strip length(剥线长度):8-9mm  
 Temp. range(操作温度): -40°C~+105°C  
 MAX Soldering(瞬时温度):+250°C,5s

Housing Material(塑件): PA66 (UL94 V-0)  
 Contact(端子): Phosphor Bronze, Tin plating(磷铜镀镍)

PITCH RANGE		NOMINAL DIMENSION RANGE				
IN MM	OVER	IN MM	OVER	OVER	OVER	OVER
TO 6	10	TO 30	30	60	100	OVER 150
TO 10	24	TO 60	60	100	TO 150	
±0.10	±0.15	±0.25	±0.30	±0.30	±0.50	±1.00

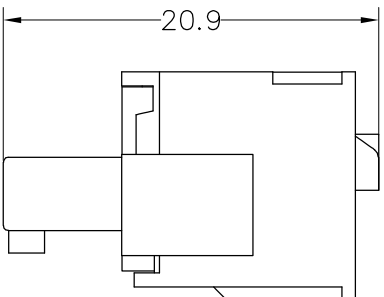

# Ordering Information


**JL15EDGKD - XXX XX G X 1**

Pitch  
 350=3.5PH  
 381=3.81PH

No.of pins  
 2P,3P,4P~24P

Housing Color  
 B=Black  
 G=Green  
 U=Blue  
 R=Red  
 W=White  
 Y=Yellow  
 O=Orange  
 E=Grey

Packing  
 0=Pe bog  
 T=Tube  
 A=Tray

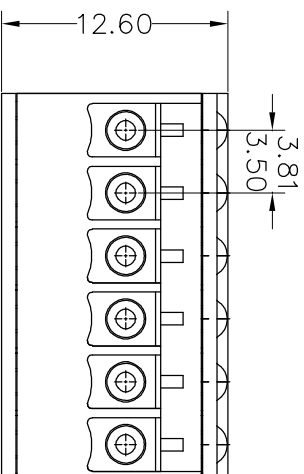

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	DIM	TOL	APPROVE	DRAW	BEN	17.08.09	SCALE	FIT	UNIT	SIZE	SHEET	PROJ.	PART NO.	TITLE:
A0	2017.08.09	NEW DRAWING		Angle	±3°		CHECK			A4	mm	1/1			JL15EDGKD-XXXXXXG1	3.50/3.81 Pitch Female Plugable Terminal Blocks	
1																	

**JINLING** 深圳市锦凌电子有限公司  
 SHENZHEN JINLING ELECTRONIC CO.,LTD  
 Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5992